

Connections (see figure "Connection diagram", below)

Connection cable #1


Connection cable for 115-230VAC supply.

- Plug type: CEE 7/7
- Cable length: 2m

Connection socket #C

24VDC output to the charging rail or to the MRX.batt battery.
Maximum charging current 6.5A.


Pin	Verwendung
1	24VDC, Ausgang
2	0VDC, Ausgang
3-7	unbenutzt




Connection socket #A

Socket #3 is available twice. It is used on the one hand to connect the foot pedal for zoom control and on the other hand to connect MRX.oct-TK. The two sockets are completely identical and can be connected as required.
Max. Current carrying capacity: 5.0A

Pin	Verwendung
1	24VDC, Ausgang
2	0VDC, Ausgang
6,7	Steuersignal Zoom
8	Power Indikator
3-5	unbenutzt



Overview (connection diagram)

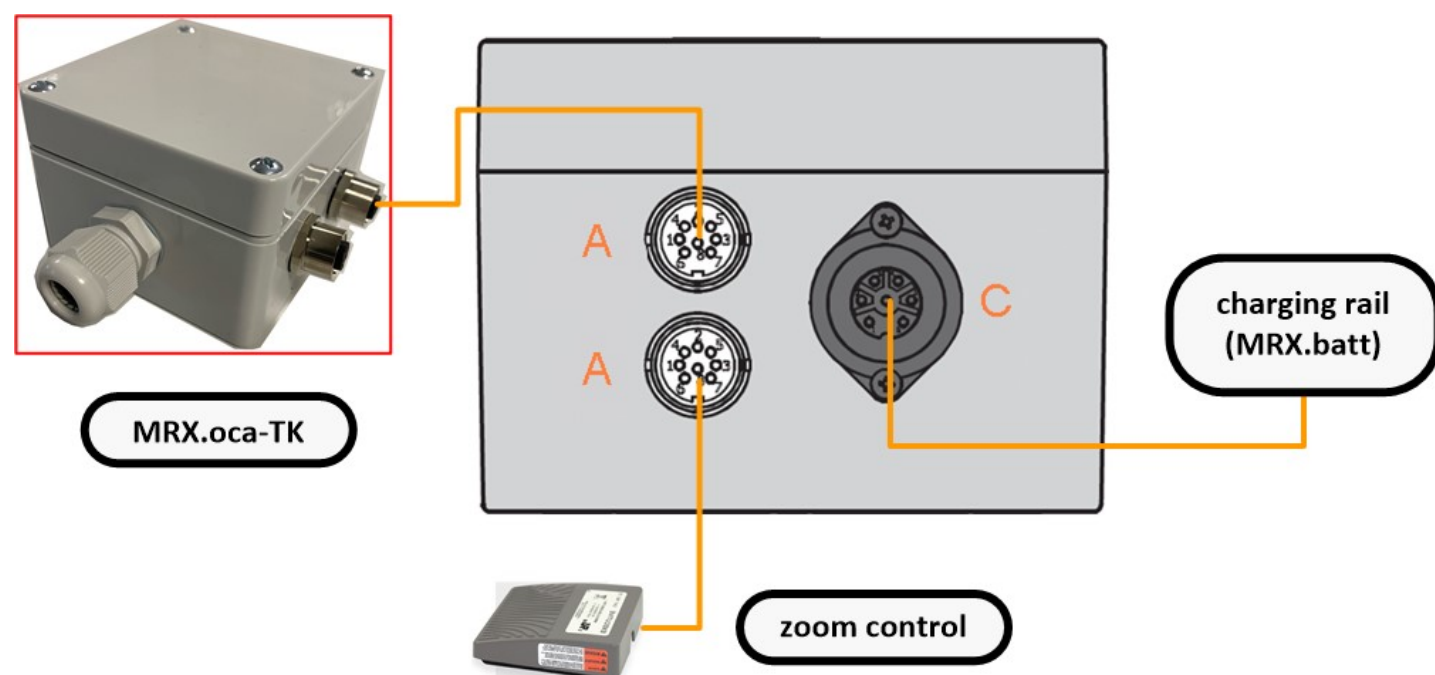

MRX.pwr

2302-4201

Kurzbedienungsanleitung

Lieferumfang

Zum Lieferumfang des Gerätes gehören:

- MRX.pwr,
- diese KBA.

Vorbereitung

Die Spannungsversorgung für das Gerät (110-230VAC) ist mit einer Sicherung abzusichern:


WARNUNG

Das Gerät darf nicht unter Spannung geöffnet werden!

Typ	115VAC	230VAC
MRX.pwr	6A	3A

Montagemöglichkeiten

MRX.pwr wird an ein Montageblech montiert.
Bohrschablone für die (Wand-) Montage (nicht maßstabsgetreu):

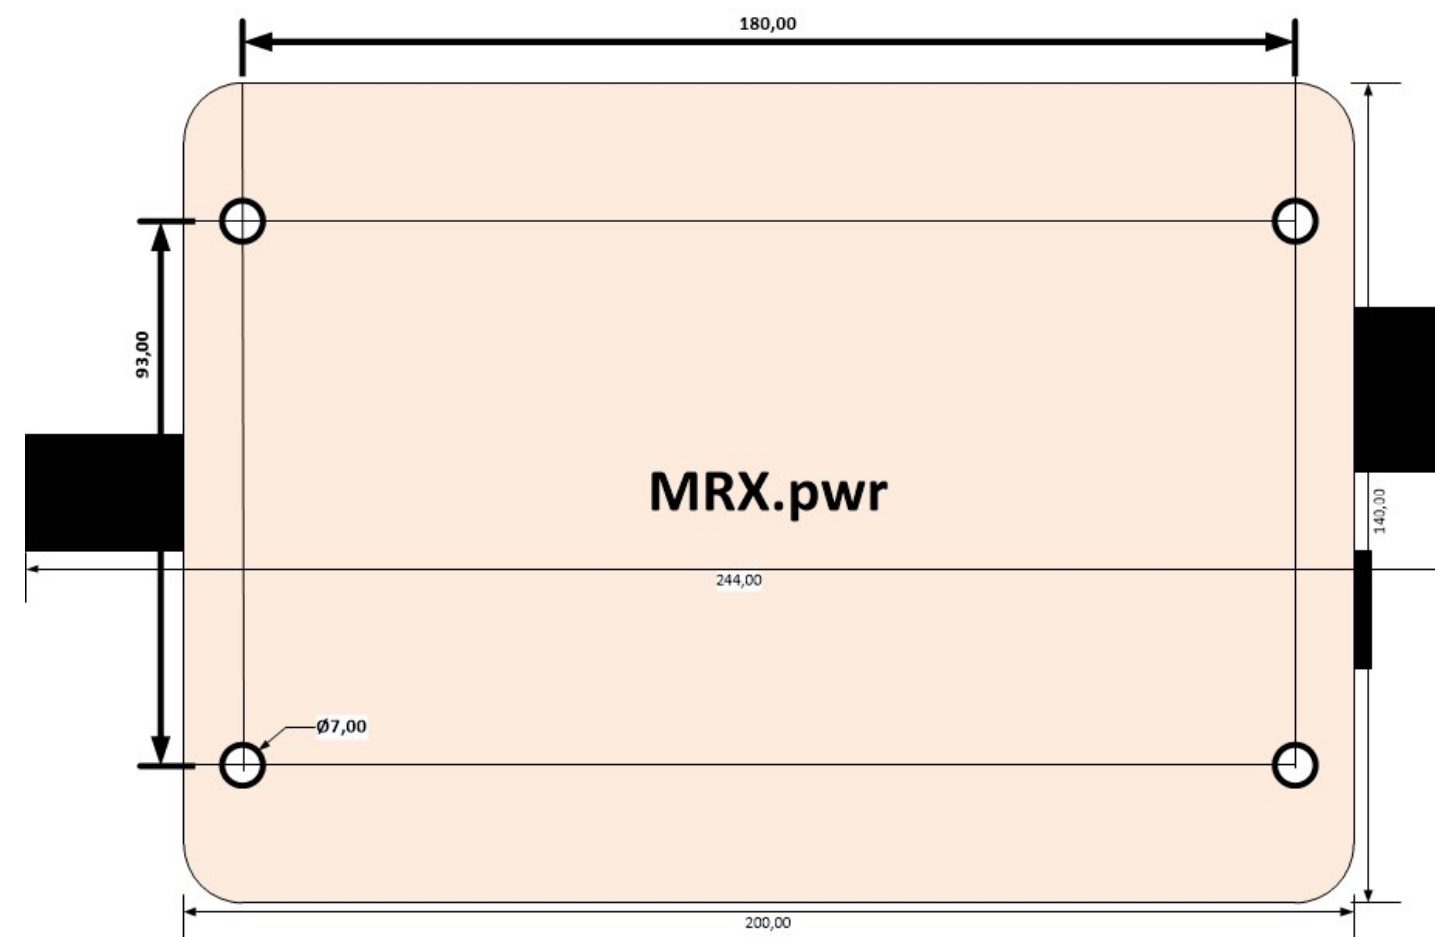

Anschlüsse (vgl. Bild „Anschluss-Schema“, unten)

Anschlusskabel #1

Anschlussleitung für 115-230VAC- Versorgung.


- Steckertyp: CEE 7/7
- Kabellänge: 2m

Anschlussbuchse #C

24VDC-Ausgang zur Ladeschiene bzw. zum Akku MRX.batt.
Maximaler Ladestrom 6.5A.

Pin Verwendung

1	24VDC, Ausgang
2	0VDC, Ausgang
3-7	unbenutzt




Anschlussbuchse #A


Buchse #3 ist zweimal vorhanden. Sie dient einerseits zum Anschluss des Fußpedals zur Zoomkontrolle und andererseits um MRX.oca-TK anzuschließen.
Die beiden Buchsen sind völlig identisch und können beliebig angeschlossen werden.
Max. Strombelastbarkeit: 5,0A

Pin Verwendung

1	24VDC, Ausgang
2	0VDC, Ausgang
6,7	Steuersignal Zoom
8	Power Indikator
3-5	unbenutzt



Übersicht (Anschluss-Schema)

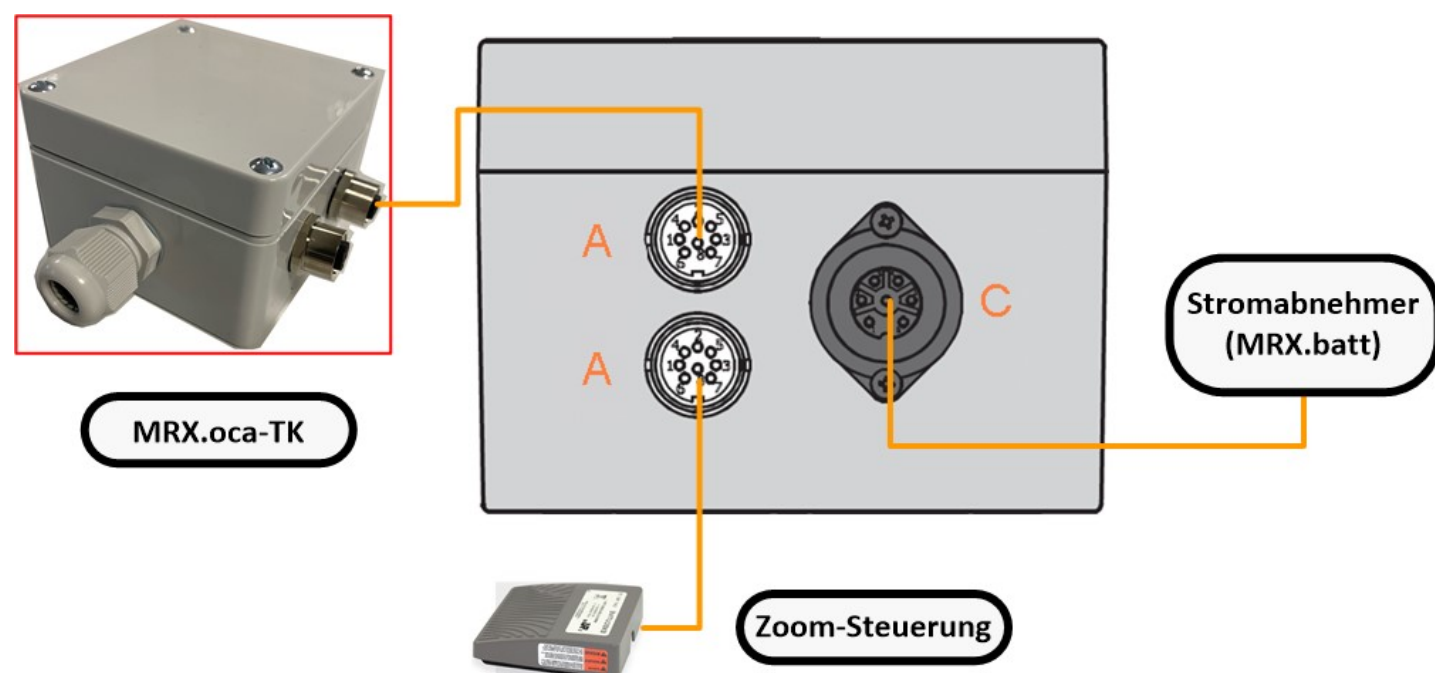

MRX.pwr

2302-4201

Quick reference guide

Delivery scope

The scope of delivery of the unit includes:

- MRX.pwr,
- this QRG.

Preperations

The power supply for the appliance (110-230VAC) must be protected by a fuse:

WARNING

The appliance must not be opened when energised!

Type	115VAC	230VAC
MRX.pwr	6A	3A

Mounting options

MRX.pwr is mounted on a mounting plate.
The drilling template for (wall) mounting (not to scale):

