

Rugged IP camera with 2MP and 36x optical zoom

Quick Start Guide


System Overview

The MRX.marine system is a modular solution for use in port and offshore environments.


Mounting

Several possible options for mounting, either pedestal, wall or ceiling. To mount the camera first attach the delivered mounting bracket to camera. The needed 4x M8 screws and washer are part of the delivery.

Two (or more) M8 screws are used to fix the camera at the designated location. It is recommended to use washer for camera installation. The universal mounting bracket allows every orientation of the camera.

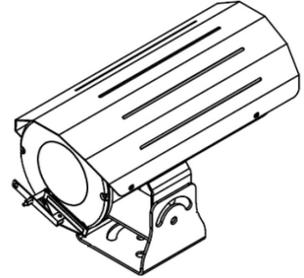

Mounting Holes

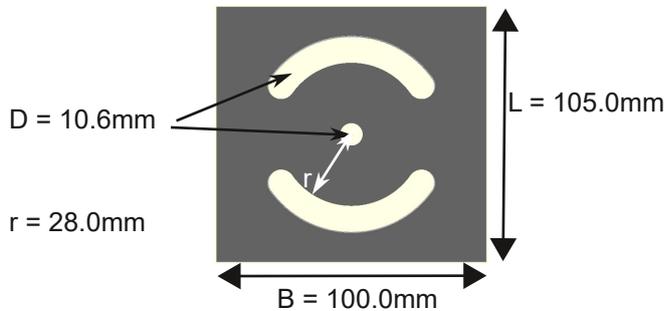

View Angle

To adopt the camera's field of view, the 4 screws on the left and right side of the bracket can be loosened. After correct alignment, the screws must be fixed again.

Wiring

The camera is equipped with a 2m installation cable. This cable has to be connected in one of the delivered "MRX.junctionBox 'Zoom'" (2503-3302).

Connect inside of MRX.junctionBox power and LAN cable to the associated connections according to the scheme, presented in the installation docs of MRX.junctionBox 'Zoom'.

